


## Pneumatically Controlled, On-Off Deluge Valve


Model: FP 400E-4D




### Typical Applications




Offshore installations



Marine environments




Self contained dry systems




Freezing environments



Sea water/corrosive water supplies



Foam applications




Single interlock pre-action

### Features and Benefits

- **Pneumatic PORV** – Best suited for corrosive and freezing conditions
- **Remote reset** – Shut-off on remote command
- **One-piece molded elastomeric moving part** – No maintenance required
- **Simple design** – Cost effective
- **Obstacle-free full bore** – Uncompromising reliability
- **Factory pre-assembled trim** – Out-of-box quality
- **In-line serviceable** – Minimal down time

### Optional Features

- **Alarm pressure-switch** (option code: P or P7)
- **Seawater service** (add FS as prefix to model)
- **Valve Position Single/Double Limit Switches**




## Operation

The BERMAD Model FP 400E-4D is suitable for systems that include dry pilot lines with pneumatic closed fusible plugs (thermal releases), and piping systems with a wide variety of open nozzles. Being pneumatically controlled, the Model FP 400E-4D is recommended in freezing environments and/or with corrosive water supply.

In the SET position the line-pressure, which is supplied to the main valve's control chamber [1] through the priming line [2], a Check Valve [3] and an Accelerator [4] with priming restriction, is trapped by the Check Valve, by a Pneumatic Pressure Operated Relief Valve (PORV) [5], held closed, and by a closed Manual Emergency Release [6]. The trapped pressure holds the main valve's diaphragm and plug against the valve seat [7], sealing it drip-tight and keeping the system piping dry. The PORV is held closed by the maintained pneumatic pressure in the detection dry pilot line.


Under FIRE or TEST conditions, a pilot line pneumatic pressure drop, opens the PORV causing water to exit through the Accelerator faster than it can be supplied. Pressure is then released from the main valve control chamber through the opened PORV, or the Manual Emergency Release, allowing the main valve to fully open and water to flow into the system piping and to the alarm device (if mounted).

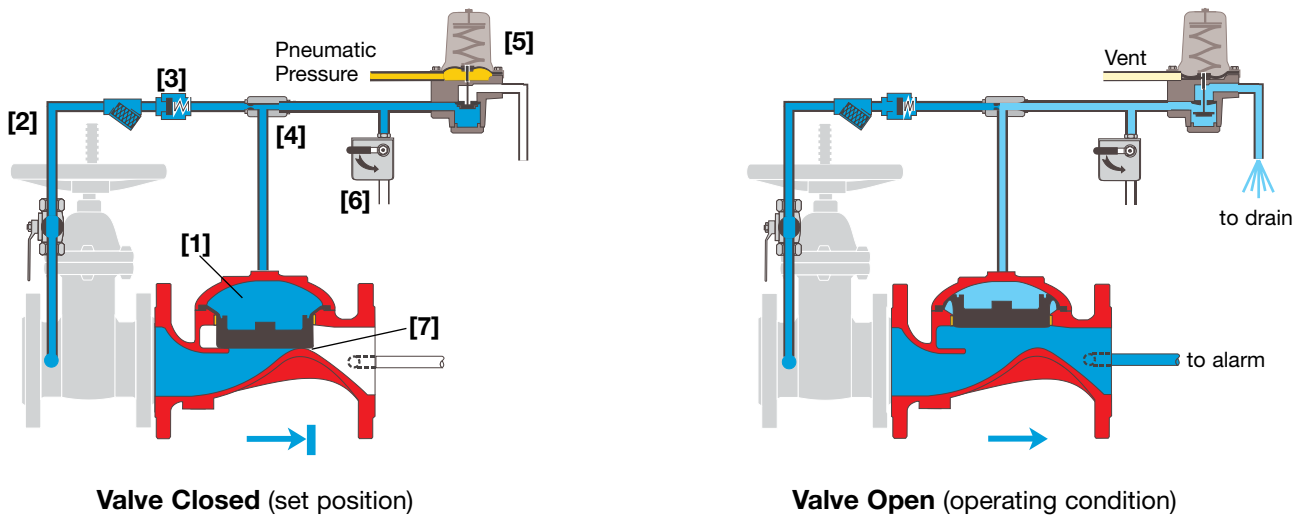

## Engineer Specifications

- The On-Off deluge valve shall be **Australian Standard SSL**, pneumatically controlled, elastomeric type globe valve with a **rolling-diaphragm**.
- The valve shall have an **unobstructed flow path**, with no stem guide or **supporting ribs**.
- Valve actuation shall be accomplished by a fully peripherally supported, one-piece balanced rolling-diaphragm, vulcanized with a rugged radial seal disk. The diaphragm assembly shall be the only moving part.
- The valve shall have a removable cover for quick in-line service enabling all necessary inspection and servicing.
- The control trim materials shall be S.S.316 tubing and fittings and plated brass accessories, including Y strainer, Accelerator, Pressure-Operated Relief Valve, and Manual Emergency Release.
- The control trim shall be supplied as an assembly, pre-assembled and hydraulically tested at an ISO 9000 and 9001 certified factory.
- The pneumatically controlled, On-Off deluge valve shall open in response to pilot line pneumatic pressure drop.

# BERMAD Fire Protection







Model: FP 400E-4D


400 Series

## System Components

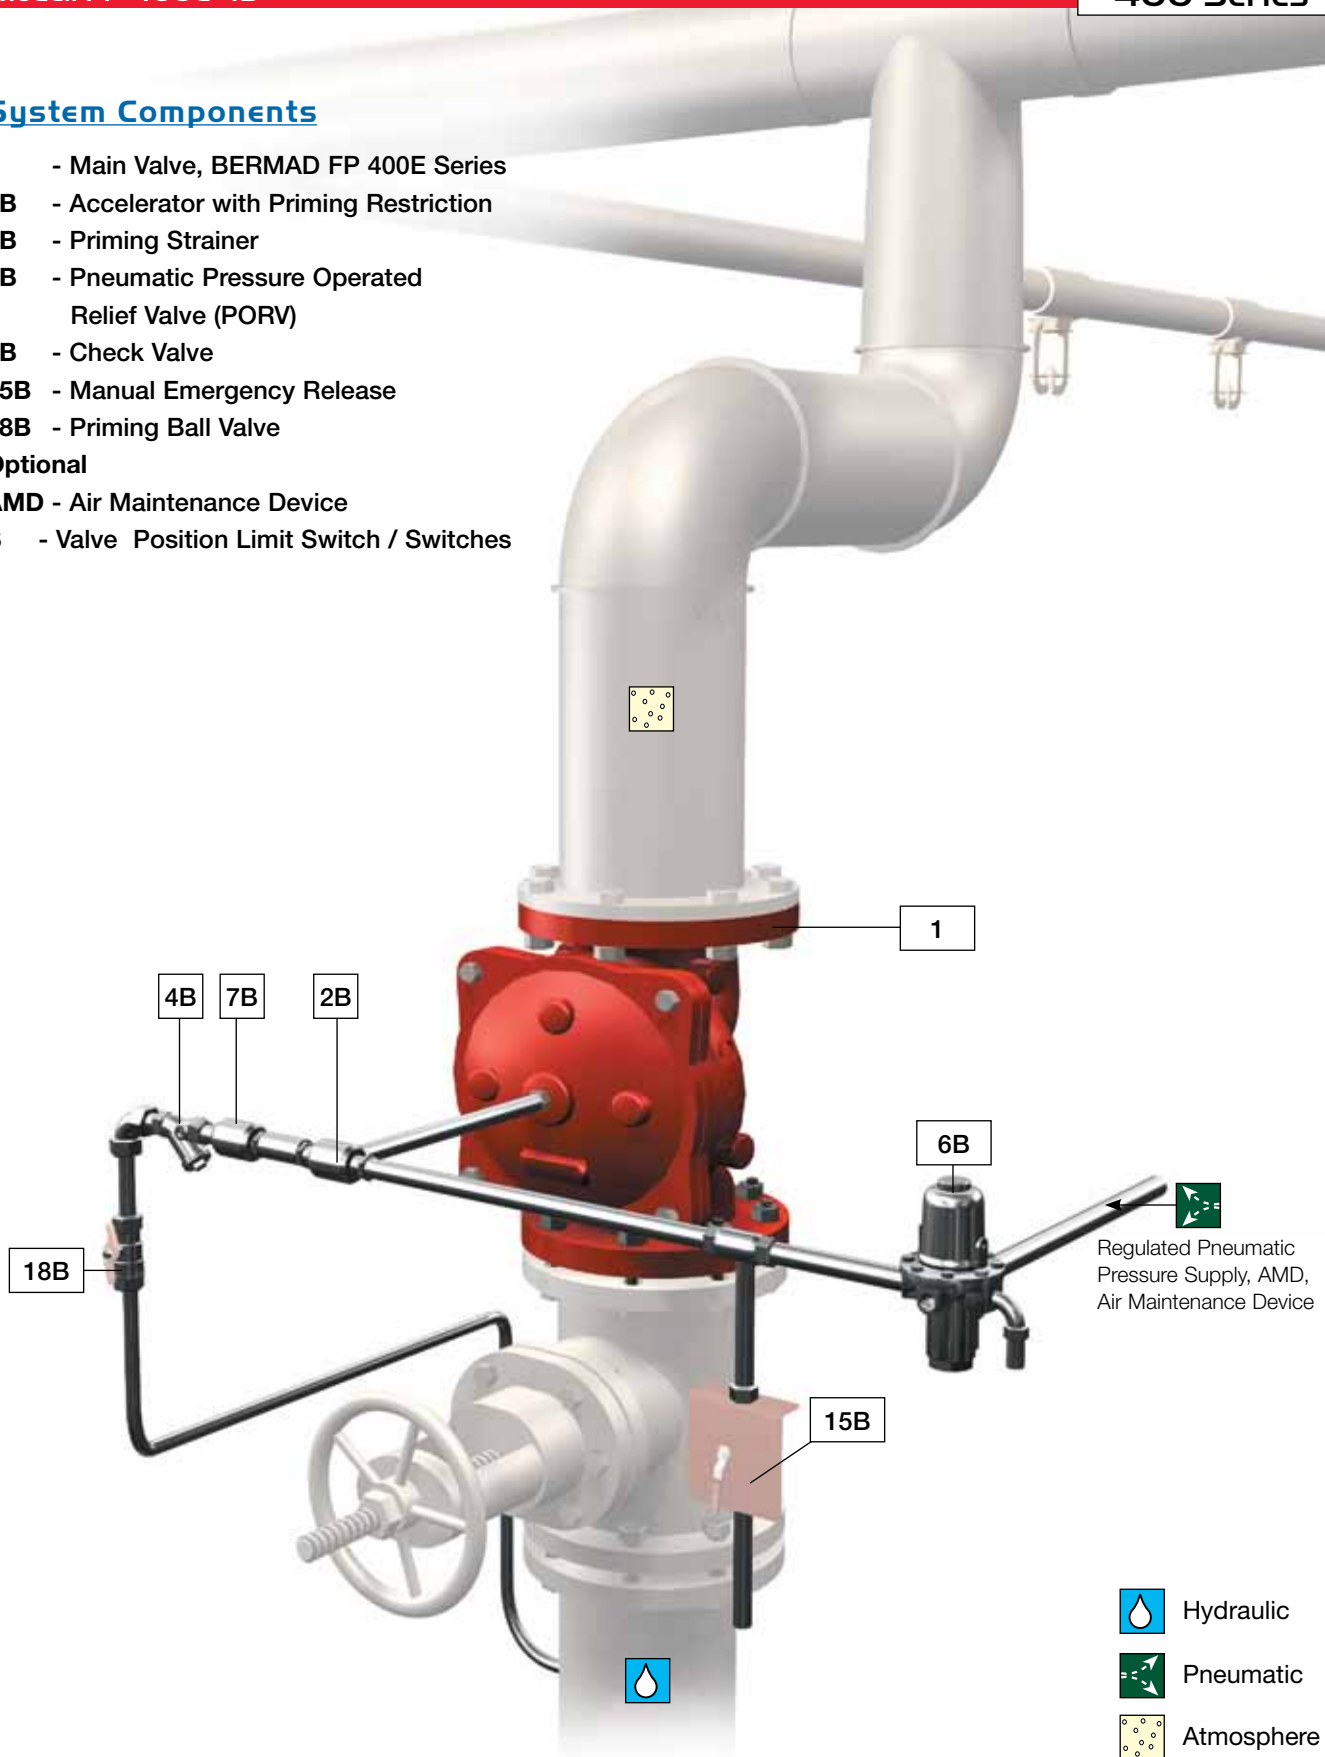
- 1 - Main Valve, BERMAD FP 400E Series
  - 2B - Accelerator with Priming Restriction
  - 4B - Priming Strainer
  - 6B - Pneumatic Pressure Operated Relief Valve (PORV)
  - 7B - Check Valve
  - 15B - Manual Emergency Release
  - 18B - Priming Ball Valve
- Optional**
- AMD - Air Maintenance Device
  - S - Valve Position Limit Switch / Switches



-  Hydraulic
-  Pneumatic
-  Atmosphere



## Technical Data

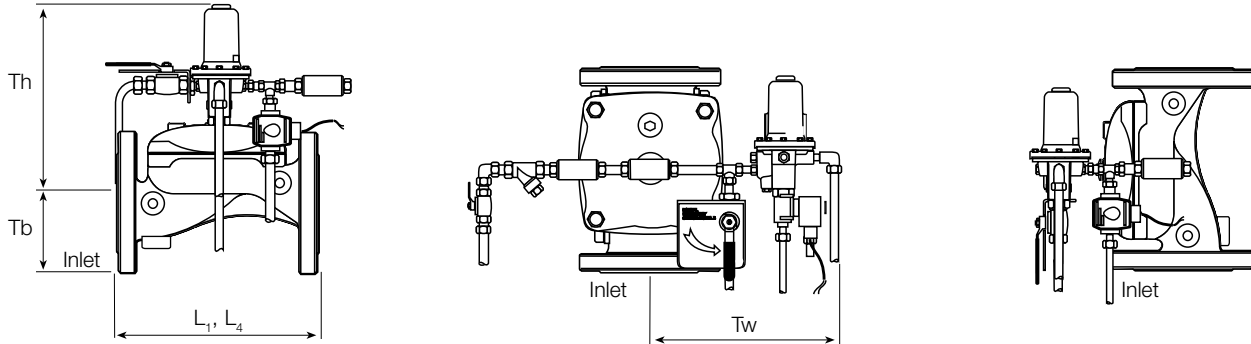

Size	1½"		2"		2½"		3"		4"		6"		8"		10"		12"		
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
Dimensions	L <sub>1</sub> <sup>(1)</sup>	205	8 <sup>1</sup> / <sub>16</sub>	205	8 <sup>1</sup> / <sub>16</sub>	205	8 <sup>1</sup> / <sub>16</sub>	257	10 <sup>2</sup> / <sub>16</sub>	320	12 <sup>10</sup> / <sub>16</sub>	415	16 <sup>5</sup> / <sub>16</sub>	500	19 <sup>11</sup> / <sub>16</sub>	607	23 <sup>14</sup> / <sub>16</sub>	725	28 <sup>9</sup> / <sub>16</sub>
	L <sub>4</sub> <sup>(2)</sup>	205	8 <sup>1</sup> / <sub>16</sub>	205	8 <sup>1</sup> / <sub>16</sub>	N/A	N/A	257	10 <sup>2</sup> / <sub>16</sub>	320	12 <sup>10</sup> / <sub>16</sub>	N/A	N/A	500	19 <sup>11</sup> / <sub>16</sub>	N/A	N/A	N/A	N/A
	Tw	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>	255	10 <sup>1</sup> / <sub>16</sub>
	Tb	64	2 <sup>8</sup> / <sub>16</sub>	78	3 <sup>1</sup> / <sub>16</sub>	89	3 <sup>8</sup> / <sub>16</sub>	100	3 <sup>15</sup> / <sub>16</sub>	115	4 <sup>8</sup> / <sub>16</sub>	140	5 <sup>8</sup> / <sub>16</sub>	172	6 <sup>12</sup> / <sub>16</sub>	204	8 <sup>1</sup> / <sub>16</sub>	242	9 <sup>8</sup> / <sub>16</sub>
	Th	289	11 <sup>6</sup> / <sub>16</sub>	289	11 <sup>6</sup> / <sub>16</sub>	301	11 <sup>14</sup> / <sub>16</sub>	325	12 <sup>13</sup> / <sub>16</sub>	345	13 <sup>9</sup> / <sub>16</sub>	420	16 <sup>9</sup> / <sub>16</sub>	471	18 <sup>9</sup> / <sub>16</sub>	471	18 <sup>9</sup> / <sub>16</sub>	588	23 <sup>2</sup> / <sub>16</sub>

- Notes:**
- L<sub>1</sub> is for flanged ANSI #150 and ISO PN16.
  - L<sub>4</sub> is for grooved end connections (Ductile Iron Only).
  - Provide adequate space around valve for maintenance.
  - Data is for envelope dimensions, specific component positioning may vary.

### Connection Standard

- Flanged: ANSI B16.42 (Ductile Iron), B16.5 (Steel & Stainless Steel), B16.24 (Bronze)
- ISO PN16
- Grooved: ANSI/AWWA C606 for 2, 3, 4, 6 & 8"

### Water Temperature

- 0.5 – 50°C (33 – 122°F)

### Available Sizes

- 1½, 2, 2½, 3, 4, 6, 8, 10 & 12"

### Pressure Rating

- Max. working pressure: 250 psi (17 bar)

### PORV Setting

Valve opens on pilot line pressure drop  
factory set: 20 psi (1.5 bar)

### Manufacturers Standard Materials

#### Main valve body and cover

- Ductile Iron ASTM A-536

#### Main valve internals

- Stainless Steel 304 & Cast Iron

#### Control Trim System

- Brass control components/accessories
- Stainless Steel 316 tubing & fittings

#### Elastomers

- Nylon fabric reinforced polyisoprene NR

#### Coating

- Electrostatic Powder Coating Polyester, Red (RAL 3002)

### Optional Materials

#### Main valve body

- Carbon Steel ASTM A-216 WCB
- Stainless Steel 316
- Ni-Al-Bronze ASTM B-148

#### Control Trim

- Stainless Steel 316
- Monel) and Al-Bronze
- Hastalloy C-276

#### Elastomers

- NBR
- EPDM

#### Coating

- High Build Epoxy Fusion-Bonded with UV Protection, Anti-Corrosion

