

Pressure Relief Valve

Model: FP 430-UF



Description

The BERMAD Model FP 430-UF pilot operated valve prevents over pressure, maintaining a constant preset system pressure regardless of fluctuating demands.

UL-Listed (up to 175 psi) and FM-Approved according to NFPA-20.

The valve offers reliable performance in:

Refineries, petrochemical complexes, tank farms,
high-rise buildings, aviation, marine and on-shore installations.


Typical Applications




Pressure relief for individual diesel fire pump



Pump station pressure relief



Centralized thermal pressure relief



Foam recirculation; maintains required foam pressure



Zone safety relief

Features and Benefits

- **Advanced Elastomeric Globe type** – Low pressure loss
- **One-piece molded elastomeric moving part** – No maintenance required
- **Simple design** – Cost effective
- **In-line serviceable** – Minimal down time


Optional Features

- **Large control filter** (code: F)
- **Seawater service construction**
- **Valve Position Single/Double Limit Switches**

Note: Optional features can be mixed and matched.

Consult your local BERMAD representative for full details

BERMAD Fire Protection




Model: FP 430-UF

400 Series

Operation

The BERMAD Model FP 430-UF remains closed as long as the sensed upstream pressure is lower than the adjustable set point. When the Pressure Relief Pilot [1] senses upstream pressure [2] that is higher than the pilot setting, it acts upon the control chamber [3] causing the main valve to modulate open, relieving excess pressure to either a reservoir or sump, thus preventing system over pressure. The Pressure Relief Pilot is equipped with an adjusting screw [4] to preset the desired upstream pressure, and an integral adjustable needle valve [5] to control the main valve closing speed. The valve's unique design provides quick reaction to system demand and keeps pressure loss at a minimum. The control system is equipped with a control strainer [6].

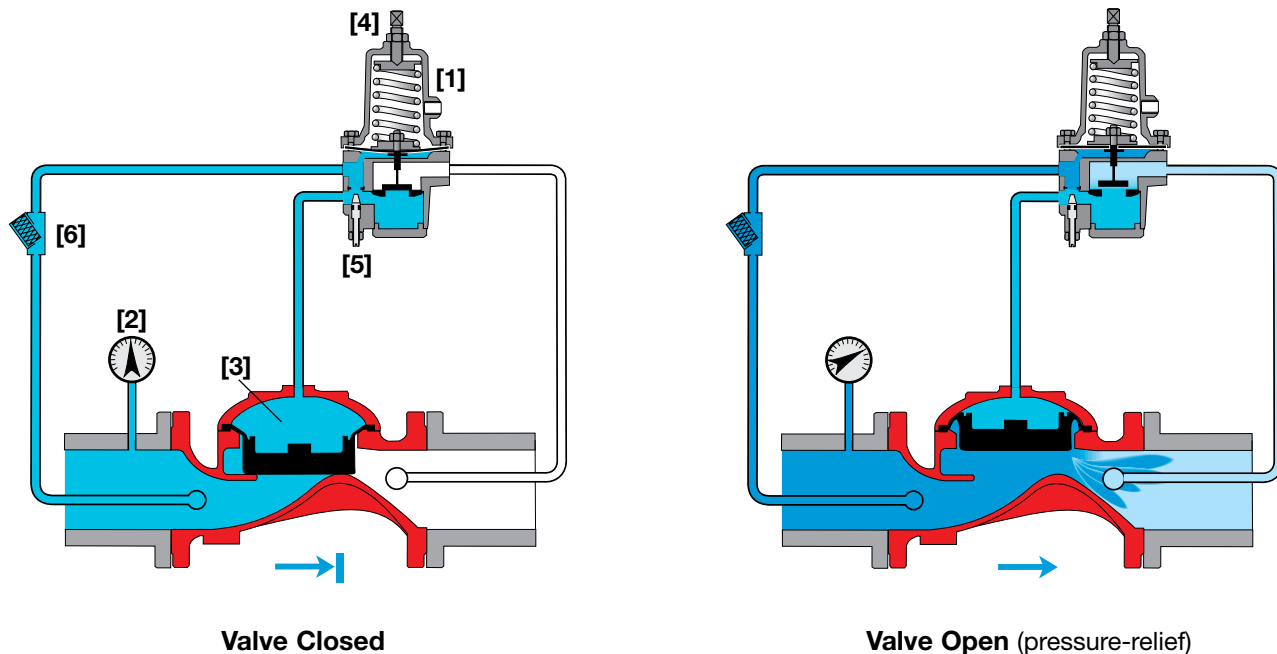

Engineer Specifications

The Pressure Relief Valve shall be UL-Listed, FM-Approved, and hydraulic pilot controlled. The main valve shall be an elastomeric type globe valve with a rolling-diaphragm.

Valve actuation shall be accomplished by a fully peripherally supported, one-piece balanced rolling-diaphragm, vulcanized with a rugged radial seal disk. The diaphragm assembly shall be the only moving part.


The valve shall have an **unobstructed flow path**, with no stem guide or **supporting ribs**.

The valve shall have a removable cover for quick in-line service enabling all necessary inspection and servicing.

The pilot system shall be field adjustable, with adjustable valve closing speed integrated into the main valve, hydraulically tested and supplied as an assembly consisting of:

- Relief pilot valve UL-Listed and FM-Approved as part of the assembly with built-in, internal needle valve
- "Y" strainer


The control trim shall be supplied as an assembly, pre-assembled and hydraulically tested at an ISO 9000 and 9001 certified factory.



Typical Installations

System Components

- 1 - BERMAD Model FP 430-UF
- 2 - Fire Pump
- 3 - Check Valve
- 4 - Pressure Gauge

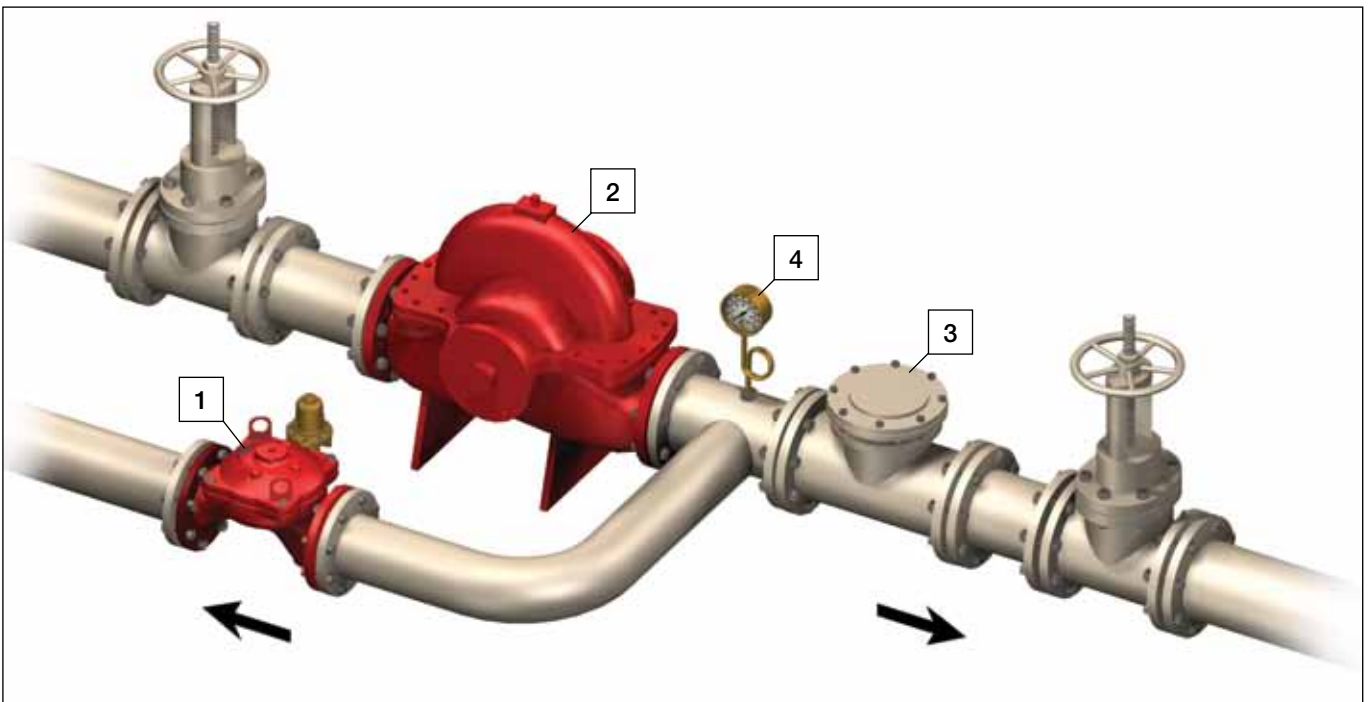


Installation Considerations


- Valve size should be no less than NFPA-20 requirements.
- Provide adequate clearance around valve for maintenance, ensuring that the actuator can be easily removed.
- Design installation with the valve cover up for best performance.
- Ensure that before the valve is installed, instructions are given to flush the pipeline at full flow.

Approvals

The BERMAD Model FP 430-UF is UL-Listed and FM-Approved when installed as a unit.



Technical Data

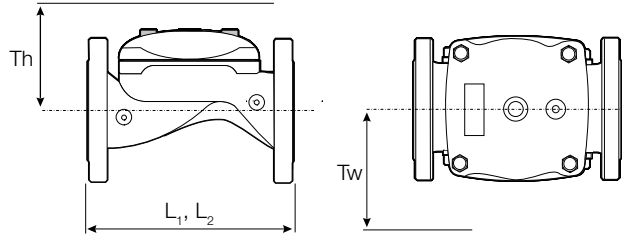

Size	2"		2½"		3"		4"		6"		8"		10"		12"		
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
Dimensions	L ₁ ⁽¹⁾	205	8½	205	8½	257	10⅞	320	12 ⁹ / ₁₆	415	16 ⁵ / ₁₆	500	19 ¹¹ / ₁₆	605	23 ¹³ / ₁₆	725	28½
	L ₂ ⁽²⁾	180	7 ¹ / ₁₆	210	8¼	255	10 ¹ / ₁₆	N/A	N/A	N/A	N/A	500	19 ¹¹ / ₁₆	N/A	N/A	N/A	N/A
	Tw	284	11 ³ / ₁₆	284	11 ³ / ₁₆	300	11 ³ / ₁₆	313	12 ⁵ / ₁₆	341	13 ⁷ / ₁₆	415	16 ⁵ / ₁₆	443	17 ⁷ / ₁₆	481	18 ¹⁵ / ₁₆
	Th	210	8¼	210	8¼	215	8 ⁷ / ₁₆	243	9 ⁹ / ₁₆	315	12 ³ / ₈	350	13¾	382	15	430	6 ¹⁵ / ₁₆

Notes:

- L₁ is for flanged valves.
- L₂ is for threaded NPT or ISO-7-Rp.
- Tw & Th are max. for pilot system.
- Data is for envelope dimensions, component positioning may vary.
- Provide space around valve for maintenance.

Connection Standard

- Flanged: ANSI B16.42 (Ductile Iron), B16.5 (Steel & Stainless Steel), B16.24 (Bronze)
- ISO PN16
- Threaded: NPT or ISO-7-Rp for 2, 2½ & 3"
- Grooved: ANSI/AWWA C606 for 2, 3, 4, 6 & 8"

Water Temperature

- 0.5 – 50°C (33 – 122°F)

Available Sizes

- Globe: 2, 2½, 3, 4, 6, 8, 10 & 12"
- UL Listed and FM approved: 2, 2½, 3, 4 & 6"

UL Listed / FM Pressure Rating

- Max. inlet: 175 psi (12 bar)
- Set: 30 - 175 psi (2 - 12 bar)
- Test: 365 psi (25 bar)

Manufacturers Standard Materials

Main valve body and cover

- Ductile Iron ASTM A-536

Main valve internals

- Stainless Steel & Elastomer

Control Trim System

- Brass control components/accessories
- Stainless Steel 316 tubing & fittings

Elastomers

- Polyamide fabric reinforced Polyisoprene, NR

Coating

- Electrostatic Powder Coating Polyester, Red (RAL 3002)

Optional Materials

Main valve body

- Carbon Steel ASTM A-216 WCB
- Stainless Steel 316
- Ni-Al-Bronze ASTM B-148

Control Trim

- Stainless Steel 316
- Monel® and Al-Bronze
- Hastelloy C-276

Elastomers

- NBR
- EPDM

Coating

- High Build Epoxy Fusion-Bonded with UV Protection, Anti-Corrosion

Approvals

- UL Listed - Fire Pump Relief Valve (QXZQ)
- FM Approved - Water Relief Valve and Fire Pump Relief Valve
- ISO 9001 QA certified
- ABS approval 2-12"
- Lloyd's Registered 2-12"

