

Pressure Reducing Pilot Valve With Integral Needle Valve

This pilot integrates all principal functions of a 2-Way control circuit in a single assembly. It is a direct acting valve, actuated by a pressure responsive diaphragm, which tends to reach equilibrium with the set spring force. When used in a pressure reducing circuit, the pilot modulates closed as downstream pressure rises above set point. An integral needle valve acts as an upstream flow restrictor as well as a closing speed control.

Features

- Integral needle valve
- Internal or external pressure sensing
- Differential pressure sensing
- Direct pressure gauge installation

Typical Applications

- Pressure Reducing Valves sizes 6-14" (Standard model #2)
- Flow Control Valves sizes 6-14" (Modified to differential sensing #2-DR)
- Surge Anticipating Valves sizes 1 1/2-4" as low pressure pilot (Modified to external pressure sensing #2-R)
- Surge control closing (additional feature 49) for sizes 6-14" (Modified to external pressure sensing #2-R)

Technical Data

- Pressure Rating:** 40 bar (600 psi)
- Working Temperature:** Water up to 80°C (180°F)
- Flow Factor:** Kv 1.0 (Cv 1.2)
- Standard Materials:**
- Body & cover:** Brass
- Elastomers:** NBR
- Internals:** Stainless Steel & Brass
- Spring:** Galvanized Steel
- Optional Materials:**
- Metal Parts:** Stainless Steel, Nickel Aluminum Bronze, Hastalloy
- Elastomers:** FPM (Viton®)


Adjustment Range

Spring	Pressure		
	bar	psi	
16	1-16	15-230	Standard
10	0.8-10	11-150	
16*	2-30	30-430	Optional
16*	2-45	30-650	

* With high pressure setting kit

Connections

Z - Upstream A - Valve control chamber C - Downstream
F/D - External sensing/pressure gauge

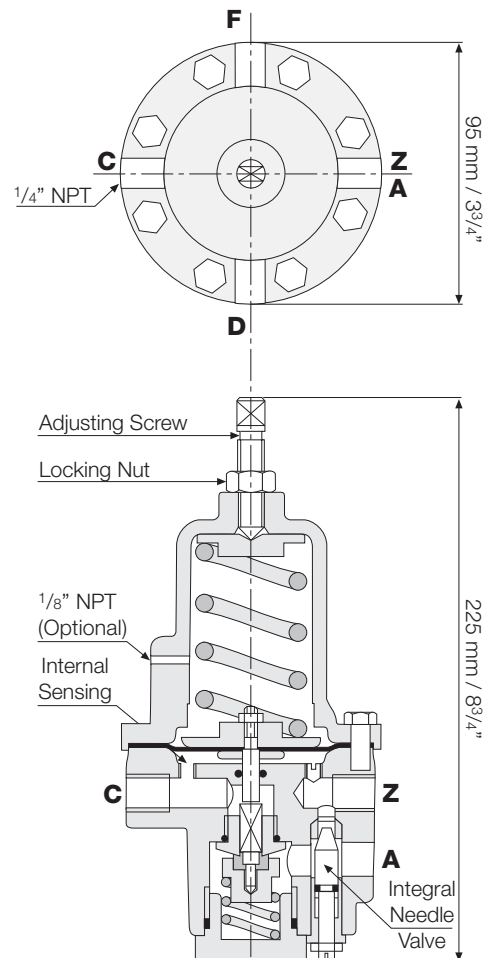

Weight: 2.7 Kg / 6 lbs.

* High pressure setting kit add 15 mm (5/8") to pilot height.

