

**Connections**


Inlet 1" BSP female (to strainer)

Outlet 3/4" BSP female from outlet


Pressure rating PN16

Materials Ductile Iron FBE coated & stainless steel

Components	
A	discharge pipework to a drain or tundish (by others)
B	Tundish or drain with air gap between air valve outlet
C	CSA Fox-AS-BS air valve, strainer assembly
D	Inlet isolation valve (gate or ball valve by others)
E	Top of the pipeline

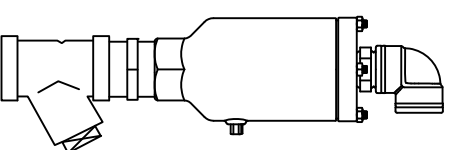

Fox-AS-HR Anti-slam air valve assembly for building services



CSA srl Strada San Giuseppe 15  
43039 Salsomaggiore Terme (PR)  
Tel. 0524/523978 Fax. 524031

Technical drawing

Fox