



WW-700-ES

Size: 24" ; DN600

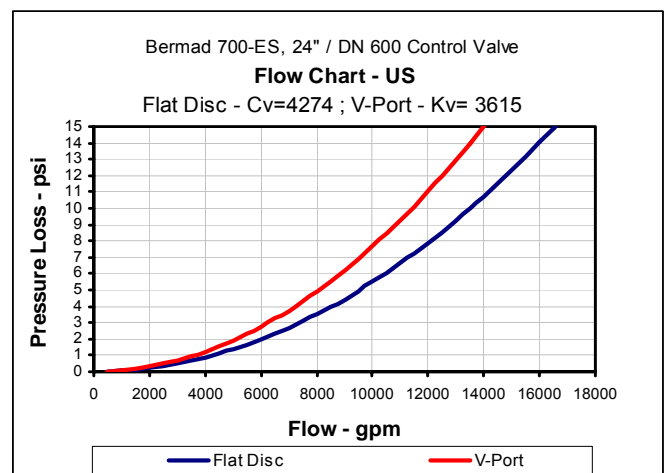

<b>Valve Pattern</b>	"Y" (Oblique)	
<b>Valve size</b>	24" / DN600	
<b>Pressure rating</b>	PN25	
<b>End Connections</b>	ISO PN16, PN25; ANSI Class 150,300	Others on request
<b>Working temperature</b>	Water up to 80°C; 180°F	
<b>Flow properties</b>	Kv=3700 (flat disc); 3130 (v-port) (m <sup>3</sup> /h@ΔP of 1.0 bar) Cv=4274 (flat disc); 3615 (v-port) (gpm@ΔP of 1.0 psi) K=14.8	
<b>Dimensions</b>	Length = 1450 mm (according to EN558-1) Width = 860 mm Height = 1240 mm Weight = 1160 Kg	
<b>Standard materials</b>	Body, Cover & separating partition – Ductile Iron Internals – Stainless steel & Bronze Elastomers – Synthetic rubber Bolts & nuts – Stainless steel	

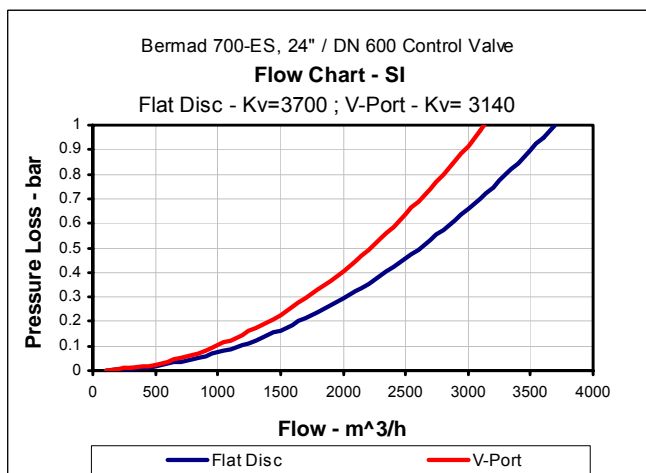

Edited by: R.L. 4/9/06	Approved by:	Item No.:	Notes:
------------------------	--------------	-----------	--------