

Solenoid Options


24VAC 2.5Watt 3 way NO
S-390T-3W-R-24VAC-NO-BO

24VAC 2.5 Watt 3 way NC
S-390T-3W-R-24VAC-NC-BO


12VDC 4Watt 3 way NO
S-390T-3W-12VDC-NO-BO

12VDC 4 Watt 3 way NC
S-390T-3W-12VDC-NC-BO


9-20VDC latch 2 wire 3 way
S-392T-2L-3W-9VDC

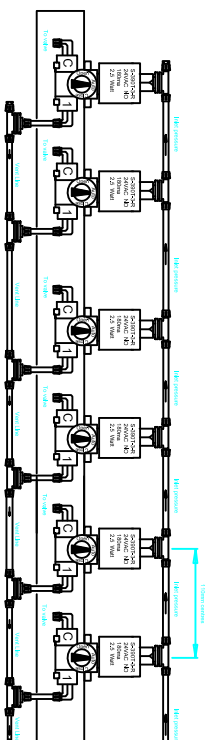


6 Solenoid bar

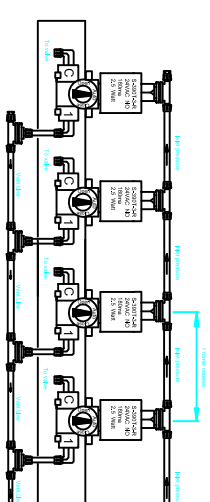


4 Solenoid bar

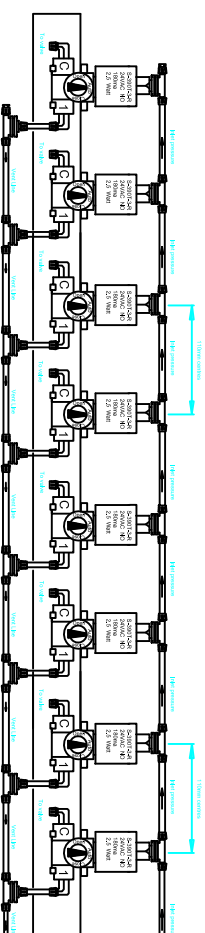


8 Solenoid bar

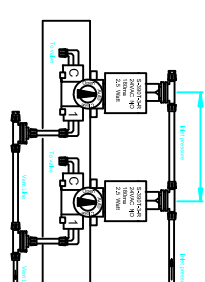


2 Solenoid bar

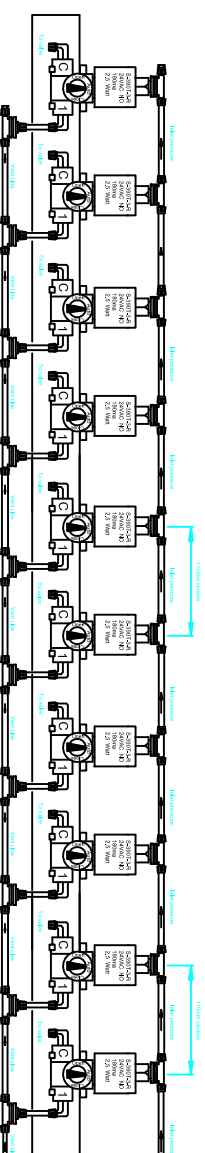

10 Solenoid bar

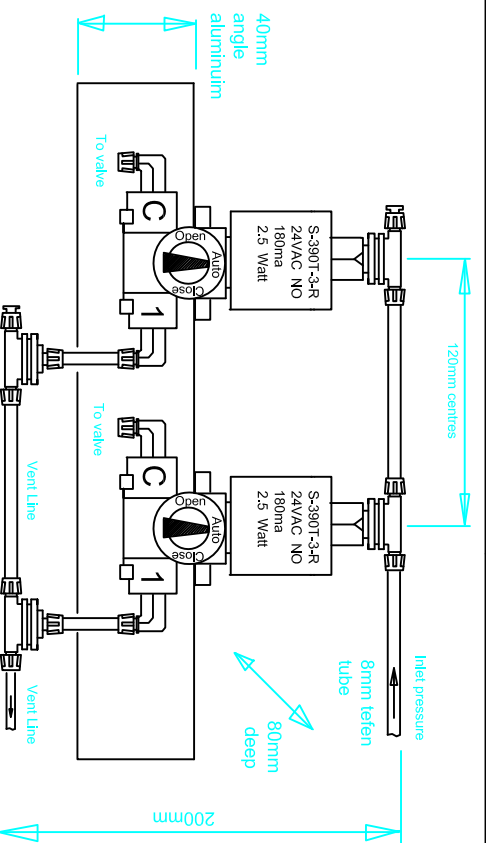

Not to Scale



Email Address
collin@bermad.com.au

Revision Number / Date
Rev 1 18.10.21

Bermad Water Technologies
26 Brand Drive, Thomastown, Vic 3074
Ph (03) 9464 2374 Fax (03) 9464 2382

Solenoid control bar using Trio solenoids
on 40mm aluminum angle

Drawn by : CK
Date : 24.8.21

Drawing Number :

