


Order codes for S-390T-3W series Trio solenoids March 2021

Order code	Solenoid series (S)	Model (390T)	3 way control (3W)	Voltage	R - Resistor type 24VAC	Normally open (NO) Normally closed (NC)	With base (BO)	Wire colour
Coil and base assy								
S390-T-3W-R-24VAC-NO-BO	S	S390T	3W	24VAC	R	NO	BO (green)	Red / Red
S390-T-3W-R-24VAC-NC-BO	S	S390T	3W	24VAC	R	NC	BO (Grey)	Red / Red
S390-T-3W-24VDC-NO-BO	S	S390T	3W	24VDC		NO	BO (green)	Black / Black
S390-T-3W-24VDC-NC-BO	S	S390T	3W	24VDC		NC	BO (Grey)	Black / Black
S390-T-3W-12VDC-NO-BO	S	S390T	3W	12VDC		NO	BO (green)	Blue / Blue
S390-T-3W-12VDC-NC-BO	S	S390T	3W	12VDC		NC	BO (Grey)	Blue / Blue
S-392T-2L-3W-9V/DC	S	S392T	3W	9-20VDC	2 wire latch	NO/NC	BO (green)	Black / Red

Coil and plunger assy / base / bracket								
S390-T-3W-R-24VAC-NO	S	S390T	3W	24VAC	R	NO	coil only	Red / Red
S390-T-3W-R-24VAC-NC	S	S390T	3W	24VAC	R	NC	coil only	Red / Red
S390-T-3W-24VDC-NO	S	S390T	3W	24VDC		NO	coil only	Black / Black
S390-T-3W-24VDC-NC	S	S390T	3W	24VDC		NC	coil only	Black / Black
S390-T-3W-12VDC-NO	S	S390T	3W	12VDC		NO	coil only	Blue / Blue
S390-T-3W-12VDC-NC	S	S390T	3W	12VDC		NC	coil only	Blue / Blue
BO-NO-T						NO	Base only	
BO-NC-T						NC	Base only	
BR-T							Bracket	



3 way NO 24VAC

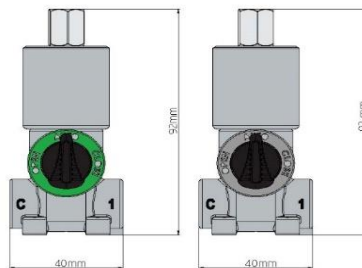

N.O.

N.C.



BR-T Bracket



Order codes for S-390T-2W series Trio solenoids March 2021

Order code	Solenoid series (S)	Model	2 way control (2W)	Voltage / Current	R - Resistor type D - Diode type	Normally open (NO) Normally closed (NC)	Coil only	Wire colour
S-390T-2W-24VAC-R-NC	S	390T	2W	24VAC	R	NC	yes	Red / Red
S-390T-2W-24VDC-NC	S	390T	2W	24VDC		NC	yes	Black / Black
S-390T-2W-12VDC-NC	S	390T	2W	12VDC		NC	yes	Blue / Blue
S-392T-2L-2W-9V/DC	S	392T	2W	9VDC		NC	yes	Black / Red



Order code	Number of outlets	Model	3 way control (3W)	Voltage	R - Resistor type 24VAC or DC or DC latch	Normally open (NO)	With base (BO)	Wire colour
Coil and base assy								
CB-2-S390T-3W-R-NO-24VAC	2	S390T	3W	24VAC	R	NO	BO (green)	Red / Red
CB-4-S390T-3W-R-NO-24VAC	4	S390T	3W	24VAC	R	NO	BO (green)	Red / Red
CB-6-S390T-3W-R-NO-24VAC	6	S390T	3W	24VAC	R	NO	BO (green)	Red / Red
CB-8-S390T-3W-R-NO-24VAC	8	S390T	3W	24VAC	R	NO	BO (green)	Red / Red
CB-10-S390T-3W-R-NO-24VAC	10	S390T	3W	24VAC	R	NO	BO (green)	Red / Red

CB-2-S390T-3W-NO-12VDC	2	S390T	3W	12VDC	DC	NO	BO (green)	Blue / Blue
CB-4-S390T-3W-NO-12VDC	4	S390T	3W	12VDC	DC	NO	BO (green)	Blue / Blue
CB-6-S390T-3W-NO-12VDC	6	S390T	3W	12VDC	DC	NO	BO (green)	Blue / Blue
CB-8-S390T-3W-NO-12VDC	8	S390T	3W	12VDC	DC	NO	BO (green)	Blue / Blue
CB-10-S390T-3W-NO-12VDC	10	S390T	3W	12VDC	DC	NO	BO (green)	Blue / Blue
CB-2-S392T-2L-3W-9V/DC	2	S392T	3W	9-20VDC	2 wire latch	NO / NC	BO (green)	Black / Red
CB-4-S392T-2L-3W-9V/DC	4	S392T	3W	9-20VDC	2 wire latch	NO / NC	BO (green)	Black / Red
CB-6-S392T-2L-3W-9V/DC	6	S392T	3W	9-20VDC	2 wire latch	NO / NC	BO (green)	Black / Red
CB-8-S392T-2L-3W-9V/DC	8	S392T	3W	9-20VDC	2 wire latch	NO / NC	BO (green)	Black / Red
CB-10-S392T-2L-3W-9V/DC	10	S392T	3W	9-20VDC	2 wire latch	NO / NC	BO (green)	Black / Red

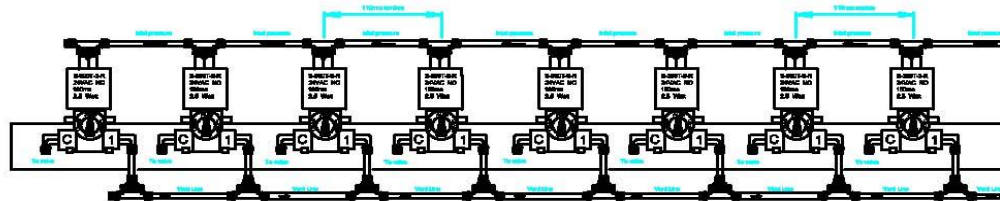

All control bars plumbed with FT fittings and 8mm nylon tube on 40mm angle aluminium bar
 All bars with snap on quick release clip for ease of solenoid removal