

## **BERMAD** Irrigation

Kinetic, Automatic & Combination Air Valves





Primary Feature (Model)	Code
Vacuum Breaker (½"); PN10	ARV
Automatic (Air Release) Air Valve (¾" - 1"); PN10	A10
Automatic (Air Release) Air Valve (¾" - 1"); PN16	A30
Kinetic (Air-Vacuum) Air Valve (¾" - 2") ; PN10	K10
Combination Air Valve (¾" - 3") ; PN10	C10
Combination Air Valve (2") ; PN10	C15
Combination Air Valve (¾" - 3"); PN16	C30
Combination Air Valve (2"); PN16	C35
Combination Air Valve for Sewage & Wastewater (2" - 4")	C50

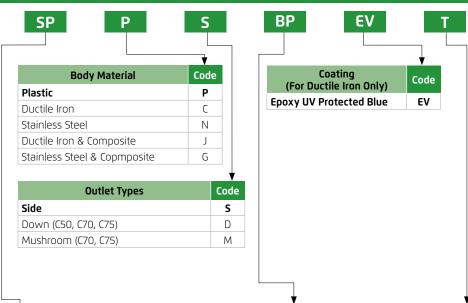

	End Connections / Pressure Ratings	Code
Threaded	BSP Male (A10/A30, K10 - ¾"-1", C10/C30, C50)	ВР
	NPT Male (A10/A30, K10 - ¾"-1", C10/C30)	NP
	BSP Female (C70 - 2", K10 - 2")	ВА
	NPT Female (C70 - 2", K10 - 2")	NA
Flanged	AST-D	SD
Adapter (Inlet Only)	Universal Flanged / BSP Male	FF
	Universal Flanged / NPT Male	FN

Additional Attributes	Code
Stainless Steel Pressure Test Point (Schrader Valve)	Т
Plastic Pressure Test Point	5
Lower Service Port 1/8" NPT (A10/A30, C10/C30 - 3/4"-1") or 1/4" NPT (C10/C30 - 2", C70, C75)	Р
¾" Female threaded Outlet (A10/A30, C10/C30 - ¾"-1")	t
Insect Screen (For C70 Only)	S
Drainage Valve (C50, C70)	Z
Stainless Steel lower float (C50)	N

Additional Features	Code
Without Additional Feature	00
Surge Protection (Anti-slam) (C10/C30 - 2"-3", C50, C70, C75)	SP
Assisted Closing (C10/C30 - 2"-3", C50, C70, C75)	AC
Inflow Prevention (C10/C30 - 2"-3", C50, C70 - 2"-6" side outlet)	IP

